

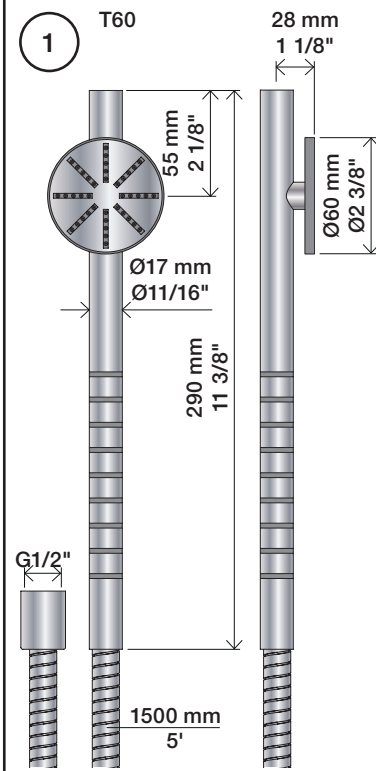
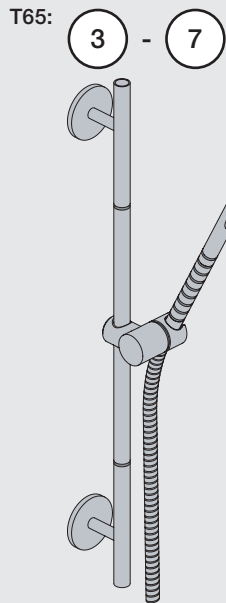


Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage




Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
Max. 65°C. 150°F						

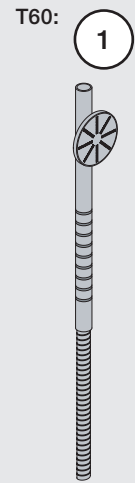

USA:
 Max. flow rate:
 1.6 Gal/min
 6.0 l/min.





Service - VR556

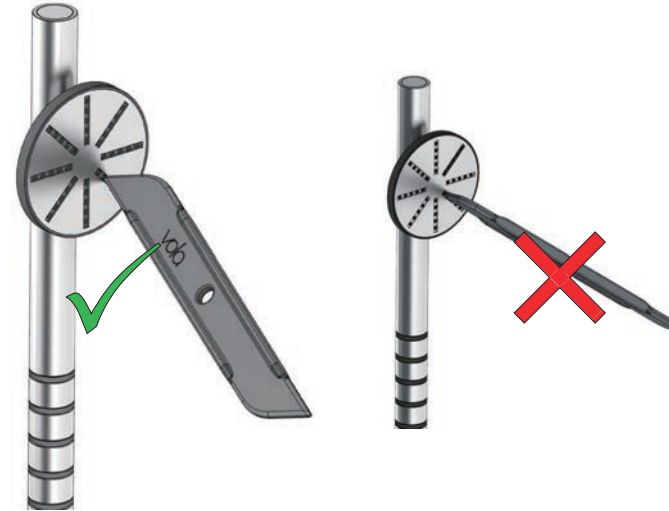


Bathtub
Badewanne

Badekar
Badkar


Badkuip
Baignoire

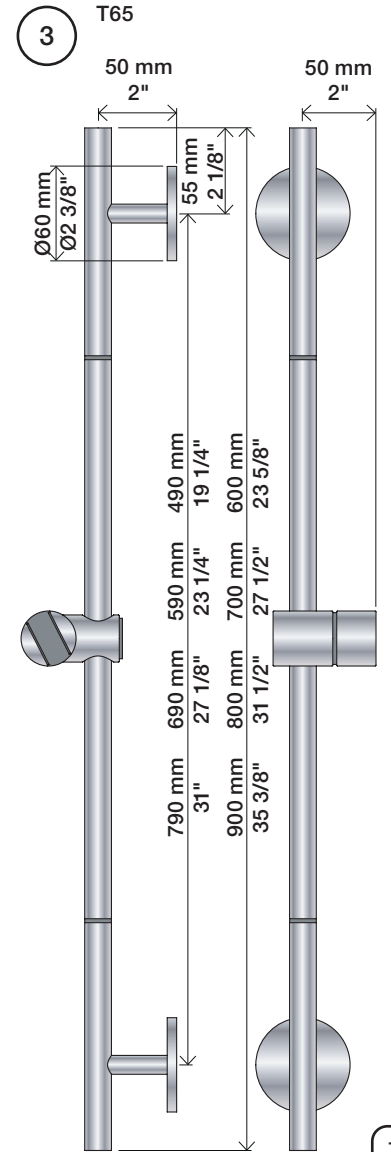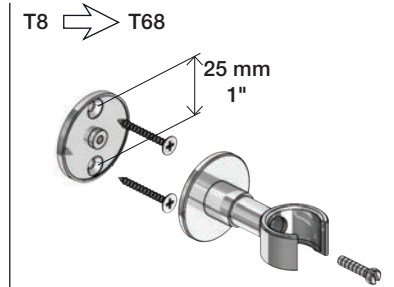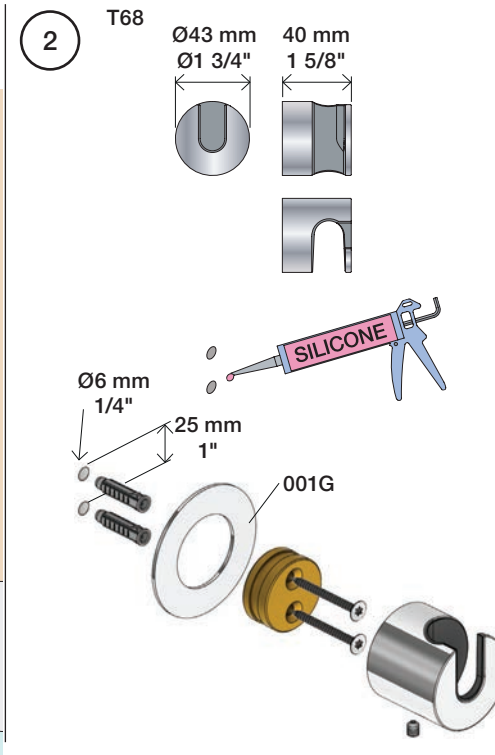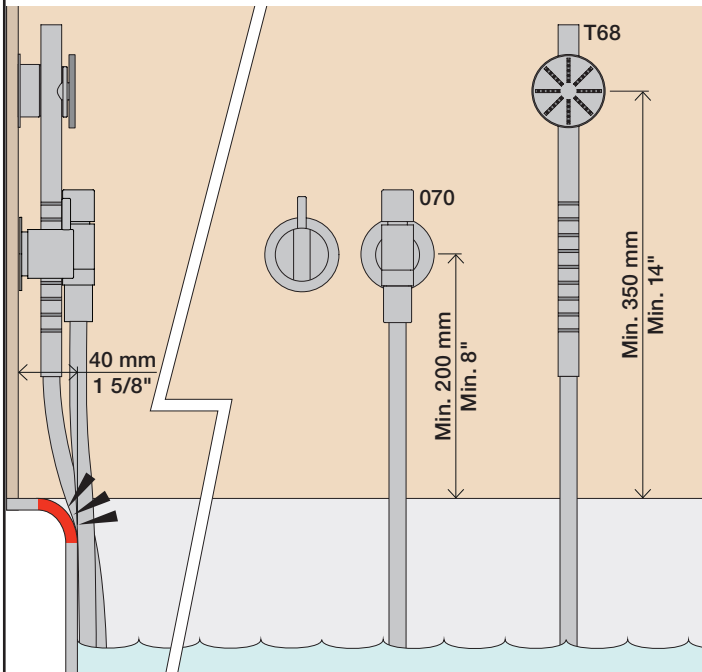




4

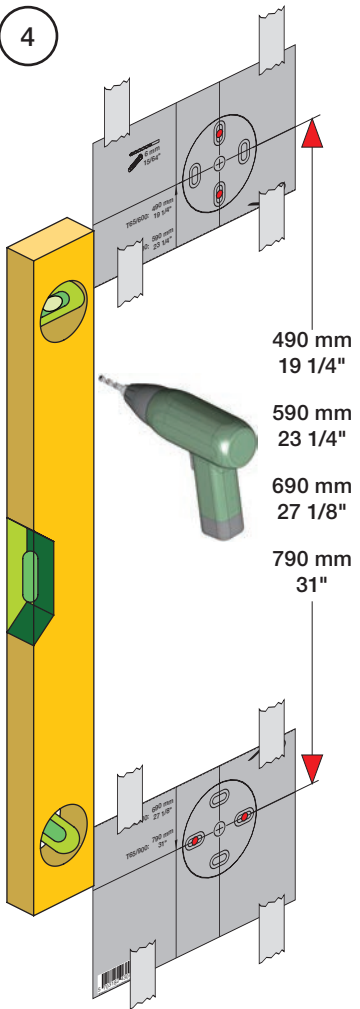



490 mm
19 1/4"
590 mm
23 1/4"
690 mm
27 1/8"
790 mm
31"

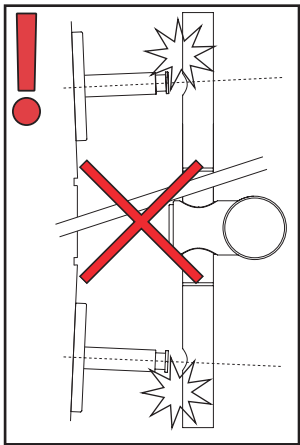


5

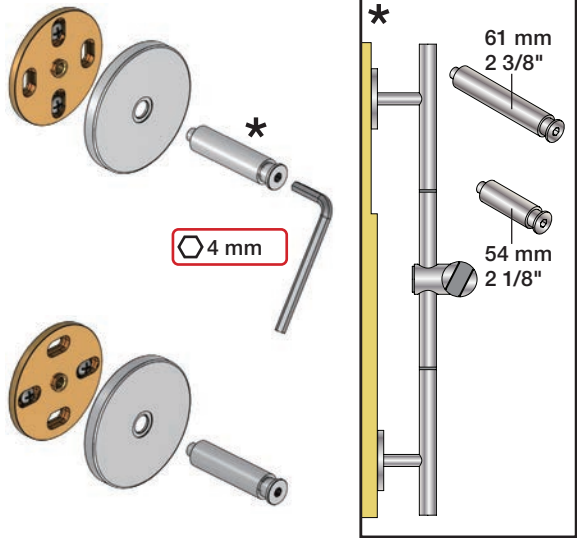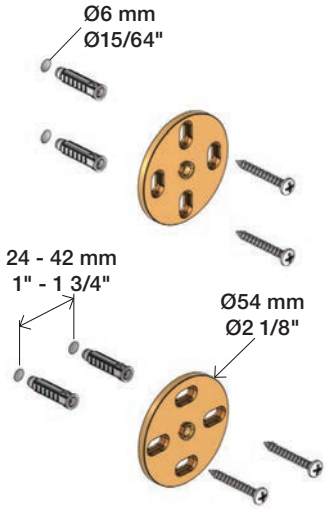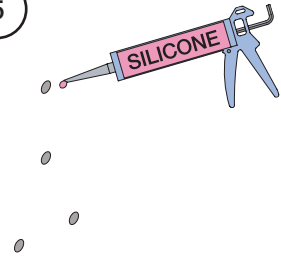

6

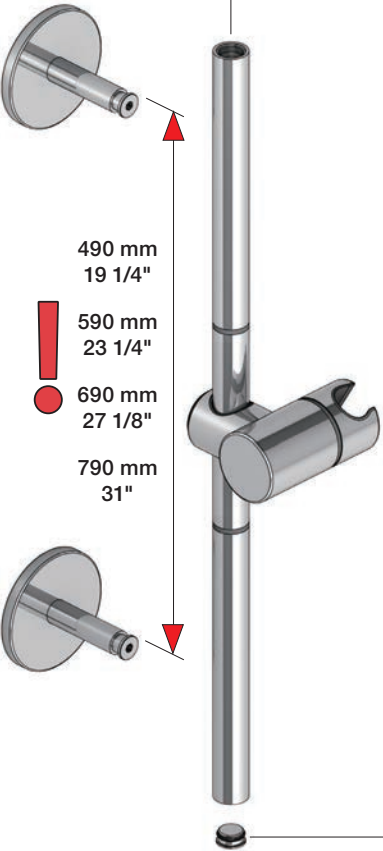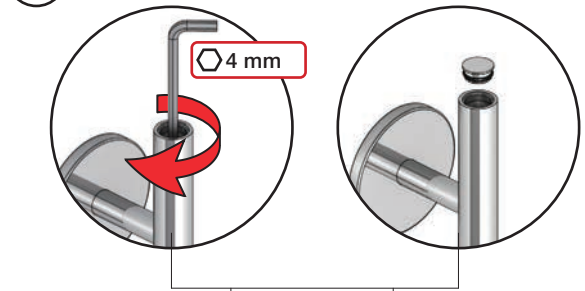

490 mm
19 1/4"
590 mm
23 1/4"
690 mm
27 1/8"
790 mm
31"



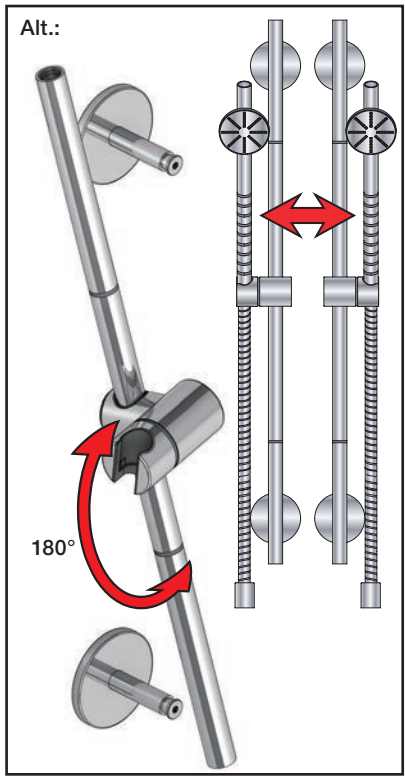


7



8



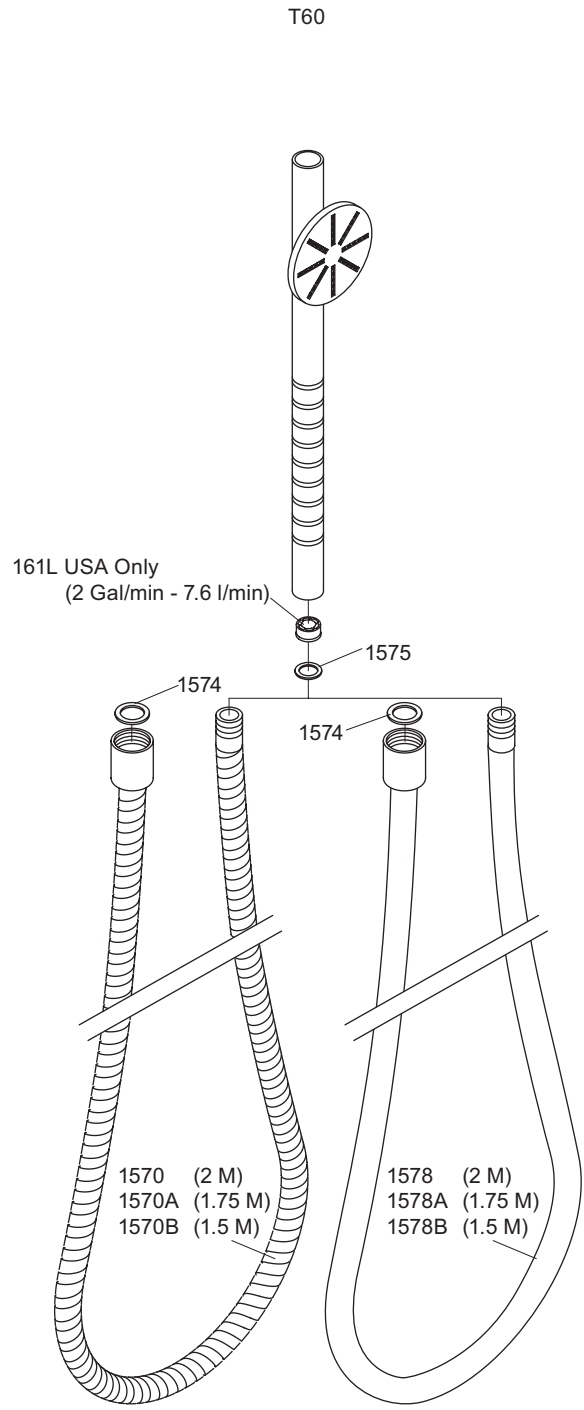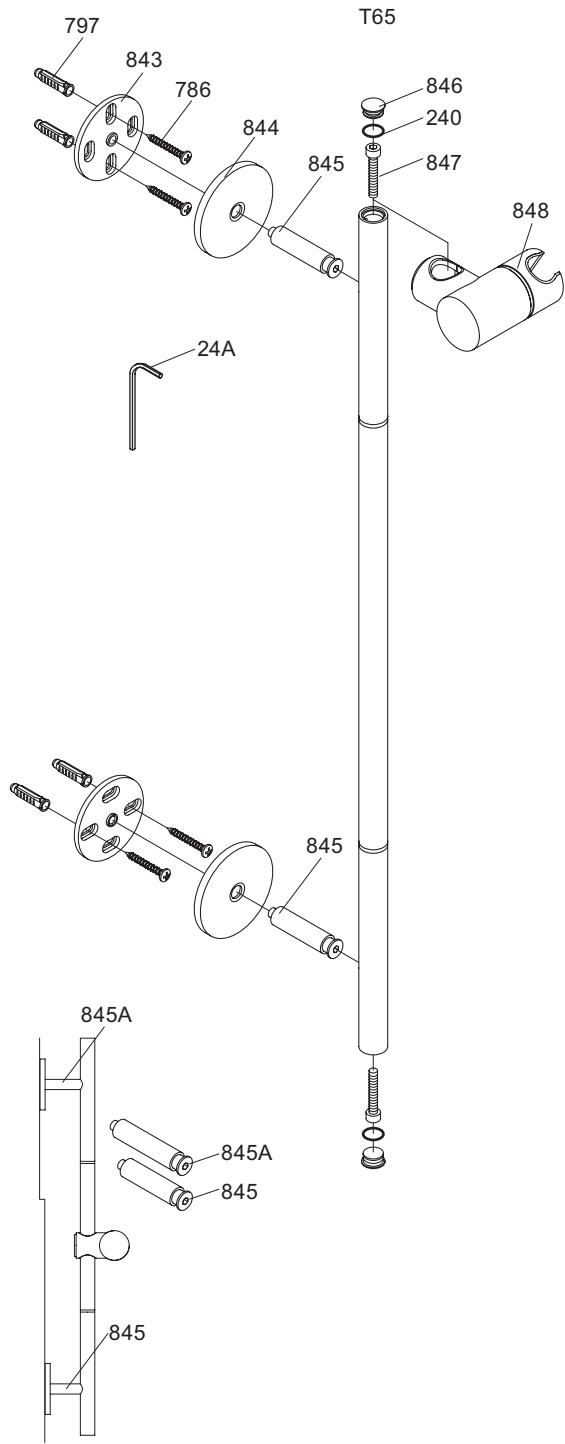

vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA T65
 T65-T60

Date	Mar. 15
Rev.	0
Sheet	SB 42.65